
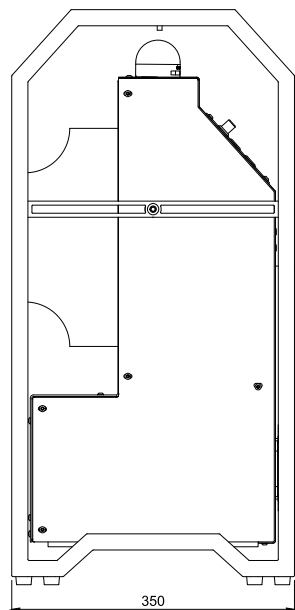


EHX-03^A

EHX-03A is a powerful and mobile generator, suitable for both mounting and dismounting. Using a Flexible Inductor, it is possible to heat components with different geometries, such as gears, couplings, and bearings.

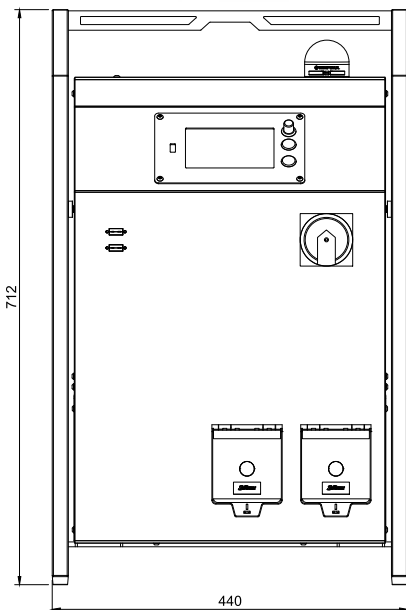

SPECIFICATIONS

INPUT *(Supplied Power)*

Voltage	400 - 480 V
Current (max.)	32 - 40 A
Frequency	50 / 60 Hz


OUTPUT *(Generated Power)*

Voltage (max.)	540 - 660 V
Current (max.)	57 A
Output Power (max.)	22 - 30 kW



Compared to the previous generation of middle-frequency generators, EHX-03A is a significant step forward. We have managed to create a more powerful output, with a form factor 3 times smaller than its predecessor.

Dimensions (L x B x H)	440 x 350 x 712 mm
Weight	39 kg






USER INTERFACE

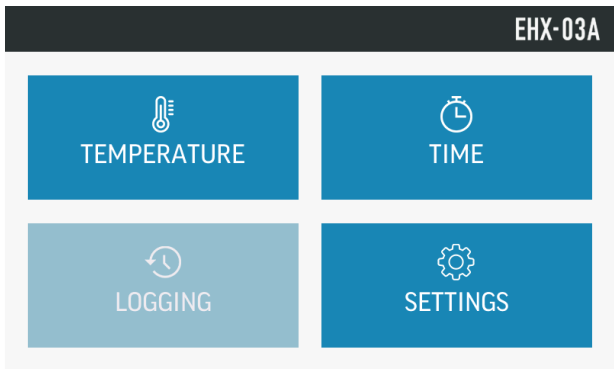

The user interface is equipped with two different Heating Modes, namely **Temperature Mode** and **Time Mode**. Through these modes, the user can easily control the heating of the component.

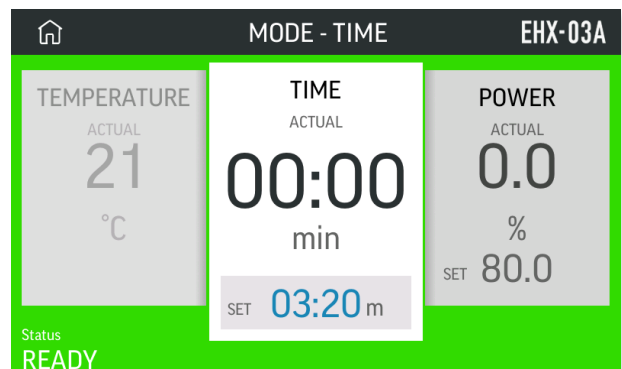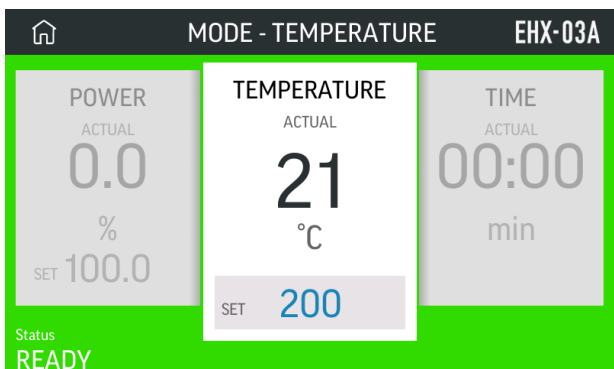

EXAMPLES OF USE

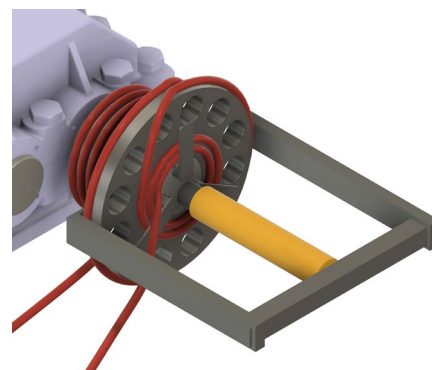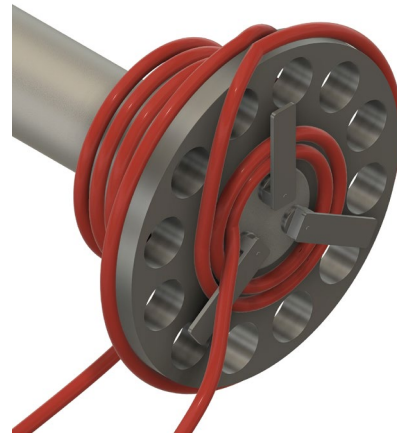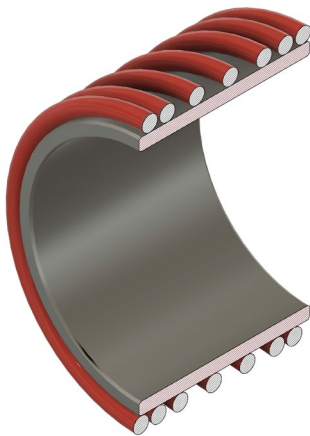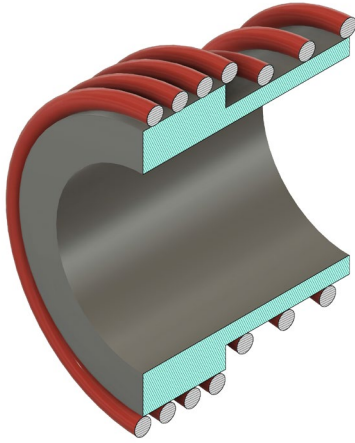

PRODUCTS

Art. No.	Item	Voltage	Current (max.)	Frequency
100540	EHX-03A (400V / 32A)	400V	32A	50/60 Hz
100550	EHX-03A (400 - 440V / 40A)	400V	40A	50/60 Hz
100545	EHX-03A (480V / 30A)	480V	30A	50/60 Hz
100555	EHX-03A (460 - 480V / 40A)	480V	40A	50/60 Hz

The following items are included for the article numbers shown above. Flexible Inductors are sold separately (see accessories), but are added to the EHX-03A crate upon order.

- ▶ EHX-03A Generator
- ▶ Temperature Sensor
- ▶ Heat-resistant gloves
- ▶ User Manual

ACCESSORIES

Art. No.	Item	Reference
006110	Flexible inductor / EHX-03A / max. 300°C/572°F - 15m	A
006111	Flexible inductor / EHX-03A / max. 300°C/572°F - 25m	A
006112	Flexible inductor / EHX-03A / max. 300°C/572°F - 35m	A
006177	Temperature Sensor 350°C - 3000mm	B
006183	Magnetic Holder for Flexible Inductor / EHX-03A (set of 4)	C

